

# Lina 73 s

## Data sheet

### Details

- Fireplace insert, open on one side
- 7345 – Height 45 cm  
7351 – Height 51 cm  
7357 – Height 57 cm  
7363 – Height 63 cm
- Self-closing door
- Adjustable lower air washing
- Standard fire box inner lining: white smooth chamotte
- High-grade cast-iron dome, all parts can be moved, adjustable between 0 – 90°
- Overall height can be simply and quickly adjusted
- Easy to dismantle for transport



Lina 73 with hinged front

### Technical data

Nominal heat output	9 kW
Thermal output range	3.2 – 10.9 kW
Efficiency	>78%
Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm
Combustion air connector	Ø 150 mm
Recommend length of logs	33 cm
Weight	230 – 260 kg
Heat distribution through the viewing window	35%
Heat distribution, convective output	65%

**Data for chimney sweep** according to DIN EN 13384 (closed operation)

### Triple values with nominal heat output

Flue gas mass flow	9.1 g/s
Flue gas temperature	320 °C
Required delivery pressure	12 Pa

### Triple values for calculating ceramic flues (wood fuel)

Firing power	19.8 kW
Flue gas mass flow	16.7 g/s
Flue gas temperature upstream of the connecting surface	345 °C
Required delivery pressure at the flue gas connector	15 Pa
Combustion air requirement	59.6 m³/h
Recommended flue length <sup>1</sup>	3.5 m

### Data for closed design

Minimum heat-emitting surface <sup>2</sup>	4.0 m²
--	--------

<sup>1</sup>The information regarding flue lengths is a recommendation and based on the calculation in accordance with TROL 2022 chapter 15. The calculation is based on a medium-heavy design and a flue ratio of 360 cm².


<sup>2</sup>Average value based on the storage time. Dependent on the material properties and the construction thickness. Mean specific heat distribution = approx. 500 W/m²

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 01/2024


### Standard



### Optional



### Accessories

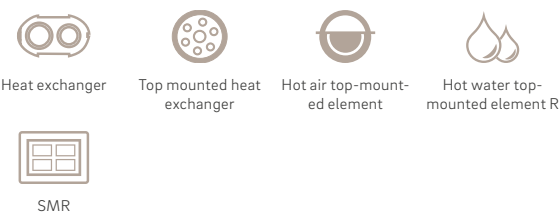

Energy efficiency class in accordance with (EU) 2015/1186




1. Federal Emissions Control Ordinance Stage 2




# Lina 73 s

## Dimensional drawing


Front view, scale 1:20

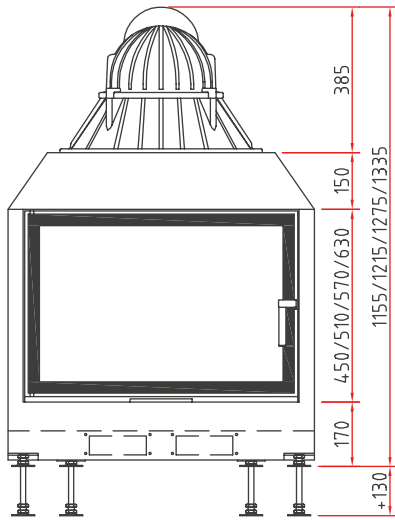

Side view, scale 1:20

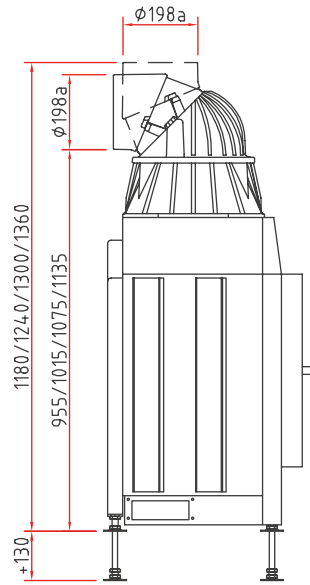

Top view, scale 1:10

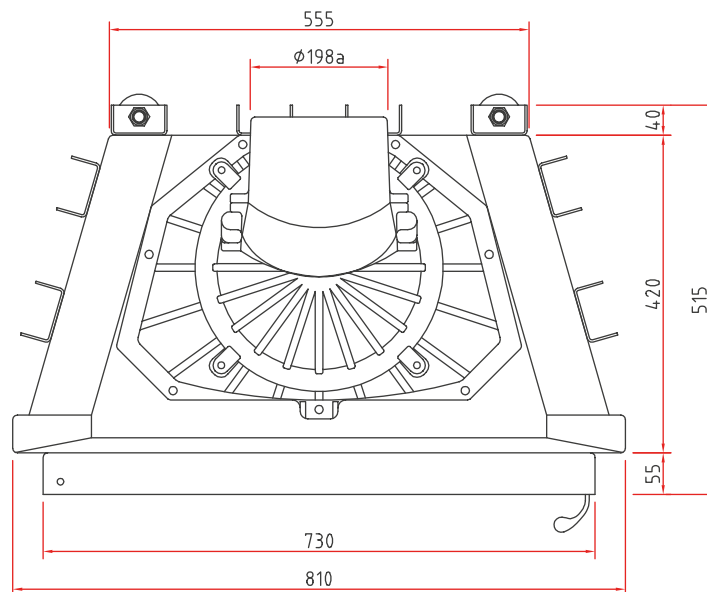

## Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Lina 73 s/h, Lina TV 73 s/h
<b>Supplier's name:</b>	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
<b>Supplier's model identifier:</b>	Lina 73 s/h, Lina TV 73 s/h
<b>Energy efficiency class:</b>	A
<b>Direct heat output (kW)</b>	9,0
<b>Indirect heat output (kW):</b>	–
<b>Energy efficiency index (EEI):</b>	103,4
<b>Energy efficiency at nominal heat output (%):</b>	78,2
<b>Notes for specific precautions, installation or maintenance:</b>	Please note the reference in the assembly instructions and operating manuals!



*There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021*



ENERG  
енергия · ενέργεια



Camina  Schmid Lina 73 s/h, Lina TV 73 s/h

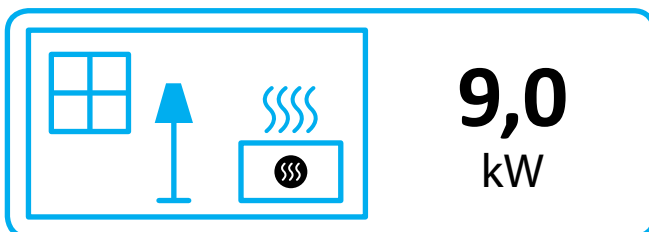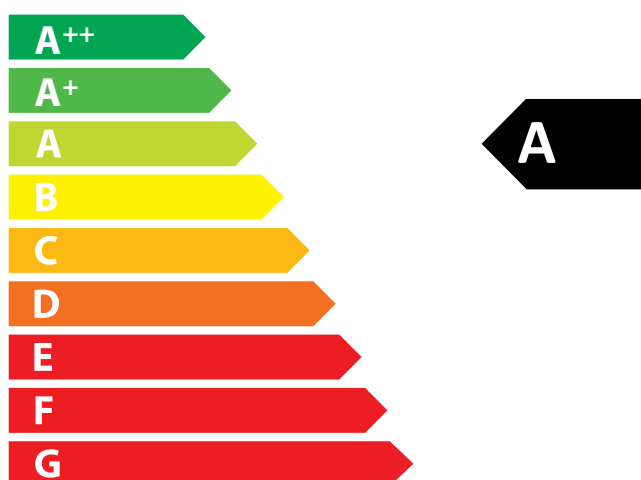

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186